


Acoustic & Sonic Inc

2298 NW 82 AVE., Doral, FL 33122

Phone: (305) 436-8360 | (786) 423-1756 | Fax:(305) 436 8585

Email: info@acousticsonic.com | www.acousticsonic.com

NEOPRENE HANGER

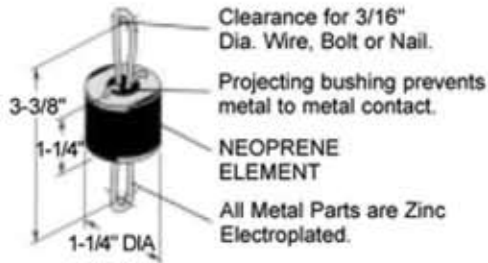

Neoprene Hangers may be used for suspending ceilings or mechanical plant. Used in low budget applications or where the disturbing vibration is generally high frequency.

WHR Load Ratings

WHR Size	Durometer	Color Code	Rated Load		Max Static Defl.	
			lbs.	kilos	in	mm
40	40	Green	Up to 60	27	0.2	5.0
50	50	Red	55-95	25-43	0.2	5.0
60	60	White	90-155	41-70	0.2	5.0
70	70	Yellow	150-220	68-100	0.2	5.0

WHR Selection Guide - Typical Application Hangers Located on 48" 120mm Centers

WHR Size	Construction	Approximate Wt.	
		Sq.Ft.	Sq.Meter
40	1" 25mm Ceiling Tile	2.5 lbs.	12 Kilos
50	2 Layers 1/2" 13mm Gypsum Board	4.5 lbs.	22 Kilos
60	2 Layers 5/8" 16mm Gypsum Board	5.6 lbs.	27 Kilos
60	2 Layers 3/4" 19mm Gypsum Board	6.8 lbs.	33 Kilos
70	Plaster and Lathe	10.0 lbs.	49 Kilos


Acoustic Sonic Inc.

Acoustic & Sonic Inc


2298 NW 82 AVE., Doral, FL 33122

Phone: (305) 436-8360 | (786) 423-1756 | Fax: (305) 436 8585

Email: info@acousticsonic.com | www.acousticsonic.com

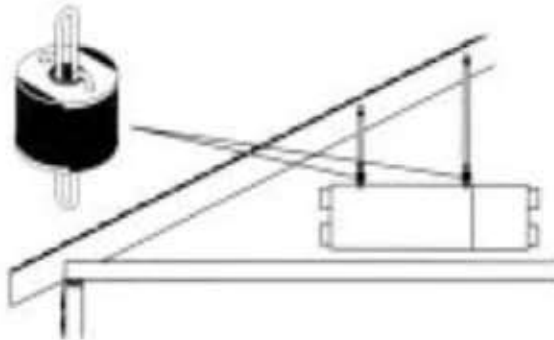

Type & Size (Durometer)	Max Load (lbs)	Rated Defl (in)	Color Mark
WHRK-40	240	0.20	Green
WHRK-50	380	0.20	Red
WHRK-60	620	0.20	White
WHRK-70	880	0.20	Yellow

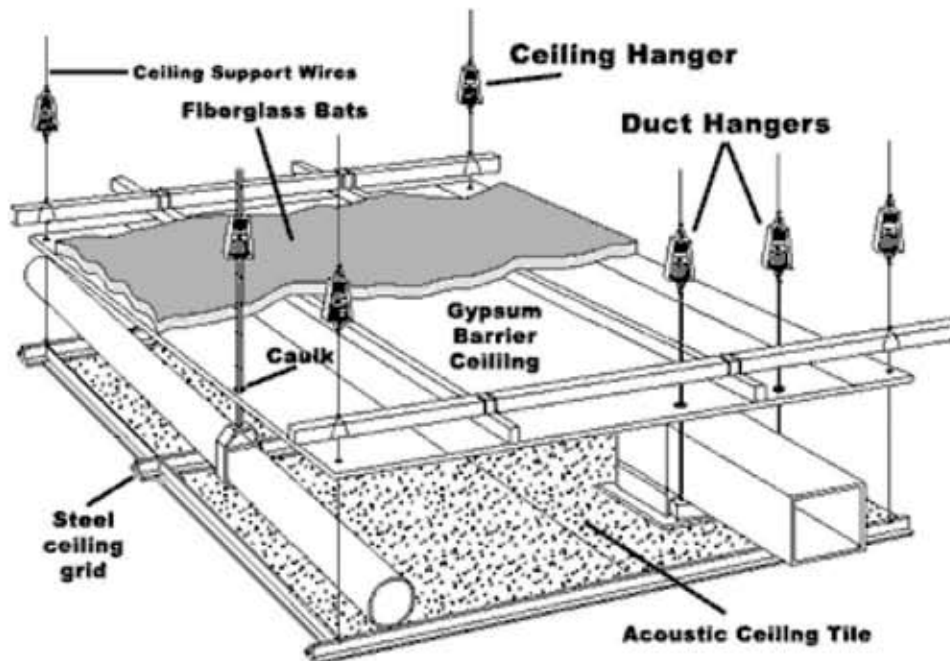

Acoustic Sonic Inc.