


TRIANGULAR WEDGE SHEETS | ACCENT SERIES

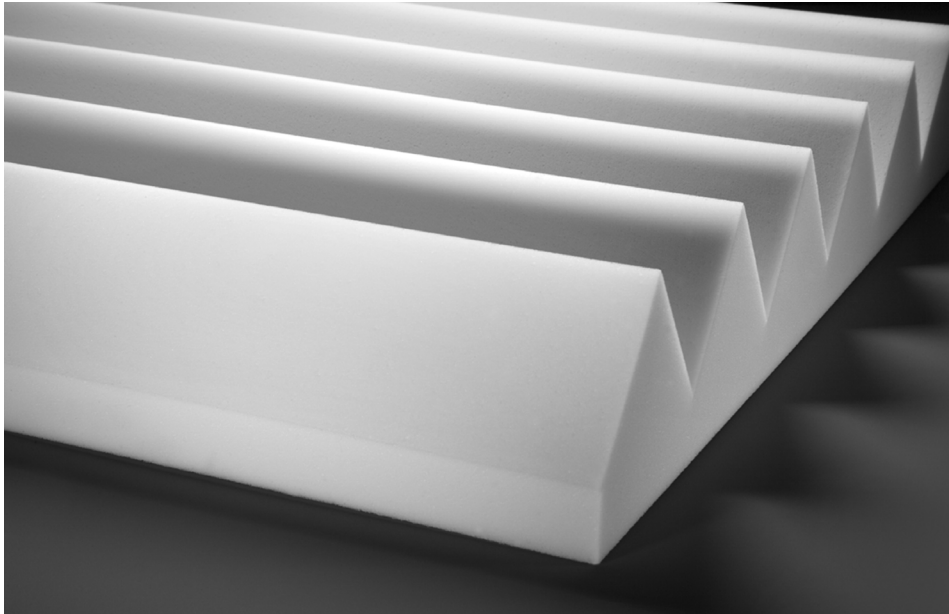

TECHLITE® Triangular Wedge Sheets

TECHLITE® Triangular Wedge Sheets provide exceptional sound absorption for a wide range of applications. Their bold design can be applied in a variety of patterns to create visual interest and maximize the acoustical performance. The unique geometry of the triangular wedge design leads to an unequalled NRC value for the ultimate in sound absorption. Lightweight and easy to install, TECHLITE® Triangular Wedge Sheets are the perfect solution to your demanding sound absorption applications.

BENEFITS

- Absorbs and reduces noise
- Very low-density / lightweight
- Excellent thermal properties
- Class A fire-rated (ASTM E 84)
- Easy to install

USES AND APPLICATIONS

- Conference rooms
- Offices
- Reception areas
- Restaurants
- Sound stages
- Recording studios

PHYSICAL PROPERTIES

Material	TECHLITE® Flexible Open-Cell Melamine Foam
Service Temp	-40°F to 350°F
Density	Light Grey 0.56 ± 0.09 lb/ft ³ White 0.47 ± 0.13 lb/ft ³
Fire Rating	Class A per ASTM E 84
Finish	White or Light Grey

SIZES/COLORS

- 24" x 24" or 24" x 48" panel with thicknesses of 2", 3" and 4"
- Natural White or Light Grey
- Other Color Options Available

Sound Absorption Coefficient [Sabins / ft ²]										
Finish	Thickness [in]	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	SAA	NRC	Mounting Type
White	2.00	0.12	0.30	0.73	0.95	1.03	1.10	0.74	0.75	A
	3.00	0.22	0.47	0.99	1.06	1.13	1.19	0.92	0.90	A
	4.00	0.33	0.67	1.19	1.18	1.23	1.24	1.05	1.05	A
Light Grey	2.00	0.10	0.30	0.76	0.93	1.05	1.12	0.76	0.75	A
	3.00	0.21	0.50	0.99	1.07	1.16	1.20	0.93	0.95	A
	4.00	0.28	0.68	1.17	1.19	1.23	1.21	1.06	1.05	A