


APPLIED CEILING TILES | ACCENT SERIES

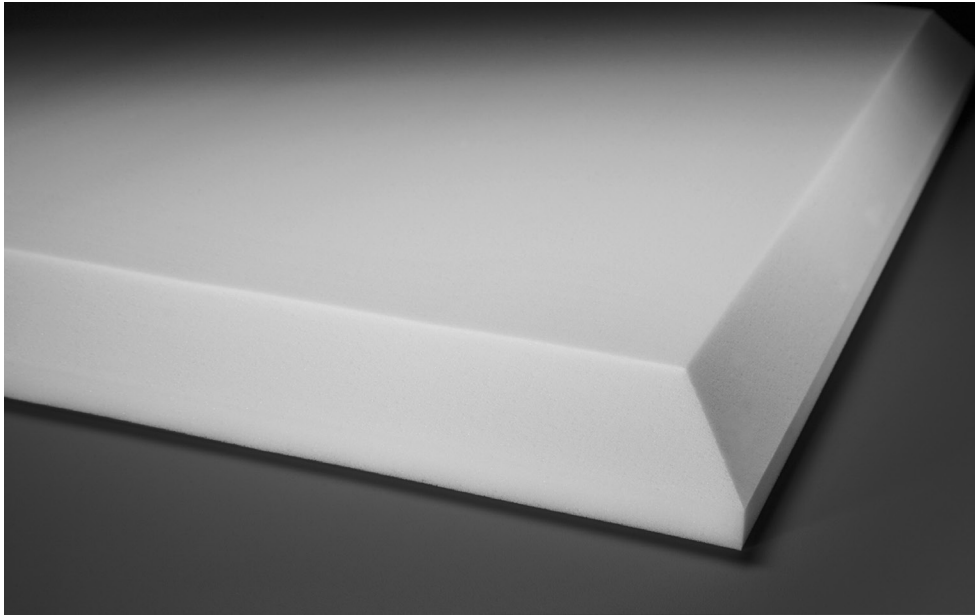

**TECHLITE® Applied Ceiling Tiles**

TECHLITE® Applied Ceiling Tiles are the natural choice when you're looking for a way to combine contemporary styling with exceptional acoustical control at a moderate price. TECHLITE® Applied Ceiling Tiles are built from lightweight TECHLITE® foam, making for easy installation and excellent sound absorption across all frequencies. If you're looking for aesthetic flair, sound absorption and functionality at an affordable price, TECHLITE® Applied Ceiling Tiles are designed to deliver. Their combined attributes make them a unique and welcome architectural option.

**BENEFITS**

- Absorbs and reduces noise
- Very low-density/lightweight
- Excellent thermal properties
- Class A fire-rated (ASTM E 84)
- Easy to install
- Fits 15/16" T-grid system

**USES AND APPLICATIONS**

- Offices
- Lobbies
- Restaurants
- Schools
- Fitness facilities

**PHYSICAL PROPERTIES**

Material	TECHLITE® Flexible Open-Cell Melamine Foam
Service Temp	-40°F to 350°F
Density	Light Grey 0.56 ± 0.09 lb/ft <sup>3</sup> White 0.47 ± 0.13 lb/ft <sup>3</sup>
Fire Rating	Class A per ASTM E 84
Finish	White or Light Grey

**SIZES/COLORS**

- 23" x 23" x 1 3/4"
- Natural White or Light Grey
- Custom Designs Available
- Other Color Options Available

Sound Absorption Coefficient [Sabins / ft <sup>2</sup> ]										
Finish	Thickness [in]	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	SAA	NRC	Mounting Type
White	1.75	0.12	0.36	0.90	0.98	0.99	1.00	0.81	0.80	A
		0.80	0.86	0.83	1.10	1.09	1.14	0.97	0.95	E

*Absorption results tested in accordance to ASTM C 423-09a*